

Scarabei Chandelier Linear 90

SCCHLN90



MATERIALS

Hand-finished or electroplated aluminium, Crystal Murano glass

WEIGHT INCL. CANOPY

Max 9.2 kg

POWER INPUT

220-240V 50-60Hz

LIGHT SOURCE (INCLUDED)

18 Proprietary LEDs,
21.6W, 3234 Lumens, 2700K warm white. CRI>95




SCARABEI CHANDELIER LINEAR 90

CONFIGURATION

VERSION

SIZE (UNIT: CM)

Scarabei Chandelier Linear 90
SCCHLN90

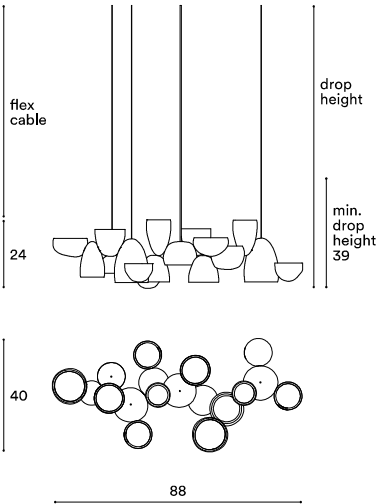

STEP 1: METAL FINISHES



Raw Aluminium
RA



Mineral White
MN



Polished Aluminium
PA



Blackened Aluminium
BA



Bronzed Aluminium
ZA

STEP 2: SUSPENSION (Fabric flex cable)

FABRIC FLEX CABLE	FINISH	DROP HEIGHT	CODE
	Black	Max 4 meters	04B
		Max 10 meters	10B

STEP 3: CANOPY

Type of Canopy		FINISH	CODE WITH DIMMABLE STANDARD			
			Phasecut	0-10 Volt Alternative dimming standard, if required by electrician	Switch / Push	DALI
	1 Canopy: Ø17×H4.5cm Driver position: Built-in	White (9016)	WH170BP	WH170BV	WH170BS	WH170BD
		Raw Alum.	RA170BP	RA170BV	RA170BS	RA170BD
		Blackened Alum.	BA170BP	BA170BV	BA170BS	BA170BD
		Bronzed Alum.	ZA170BP	ZA170BV	ZA170BS	ZA170BD
		Polished Alum.	PA170BP	PA170BV	PA170BS	PA170BD
	1 Canopy: Ø17×H4.5cm Driver position: Remote Requires Electrician's Approval	White (9016)	WH170RP	WH170RV	WH170RS	WH170RD
		Raw Alum.	RA170RP	RA170RV	RA170RS	RA170RD
		Blackened Alum.	BA170RP	BA170RV	BA170RS	BA170RD
		Bronzed Alum.	ZA170RP	ZA170RV	ZA170RS	ZA170RD
		Polished Alum.	PA170RP	PA170RV	PA170RS	PA170RD

Custom colours (RAL Classic): availability and price upon request

Scarabei Chandelier Linear 120

SCCHLN120



MATERIALS

Hand-finished or electroplated aluminium, Crystal Murano glass

WEIGHT INCL. CANOPY

Max 14.5 kg

POWER INPUT

220-240V 50-60Hz

LIGHT SOURCE (INCLUDED)

26 Proprietary LEDs,
33.3W, 4998 Lumens, 2700K warm white. CRI>95




SCARABEI CHANDELIER LINEAR 120

CONFIGURATION

VERSION

SIZE (UNIT: CM)

Scarabei Chandelier Linear 120
SCCHLN120

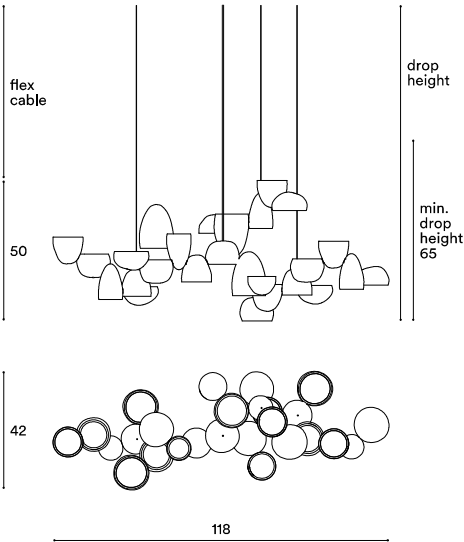

STEP 1: METAL FINISHES



Raw Aluminium
RA



Mineral White
MN



Polished Aluminium
PA



Blackened Aluminium
BA



Bronzed Aluminium
ZA

STEP 2: SUSPENSION (Fabric flex cable)

FABRIC FLEX CABLE	FINISH	DROP HEIGHT	CODE
	Black	Max 4 meters	04B
		Max 10 meters	10B

STEP 3: CANOPY

Type of Canopy		FINISH	CODE WITH DIMMABLE STANDARD			
			Phasecut	0-10 Volt Alternative dimming standard, if required by electrician	Switch / Push	DALI
	1 Canopy: Ø17×H4.5cm Driver position: Built-in	White (9016)	WH170BP	WH170BV	WH170BS	WH170BD
		Raw Alum.	RA170BP	RA170BV	RA170BS	RA170BD
		Blackened Alum.	BA170BP	BA170BV	BA170BS	BA170BD
		Bronzed Alum.	ZA170BP	ZA170BV	ZA170BS	ZA170BD
		Polished Alum.	PA170BP	PA170BV	PA170BS	PA170BD
	1 Canopy: Ø17×H4.5cm Driver position: Remote Requires Electrician's Approval	White (9016)	WH170RP	WH170RV	WH170RS	WH170RD
		Raw Alum.	RA170RP	RA170RV	RA170RS	RA170RD
		Blackened Alum.	BA170RP	BA170RV	BA170RS	BA170RD
		Bronzed Alum.	ZA170RP	ZA170RV	ZA170RS	ZA170RD
		Polished Alum.	PA170RP	PA170RV	PA170RS	PA170RD

Custom colours (RAL Classic): availability and price upon request

Scarabei Chandelier Linear 155

SCCHLN155



MATERIALS

Hand-finished or electroplated
aluminium, Crystal Murano glass

WEIGHT INCL. CANOPY

Max 17.9 kg

POWER INPUT

220-240V 50-60Hz

LIGHT SOURCE (INCLUDED)

32 Proprietary LEDs,
41.2W, 6174 Lumens, 2700K warm white. CRI>95



SCARABEI CHANDELIER LINEAR 155


CONFIGURATION

VERSION

SIZE (UNIT: CM)

Scarabei Chandelier Linear 155

SCCHLN155

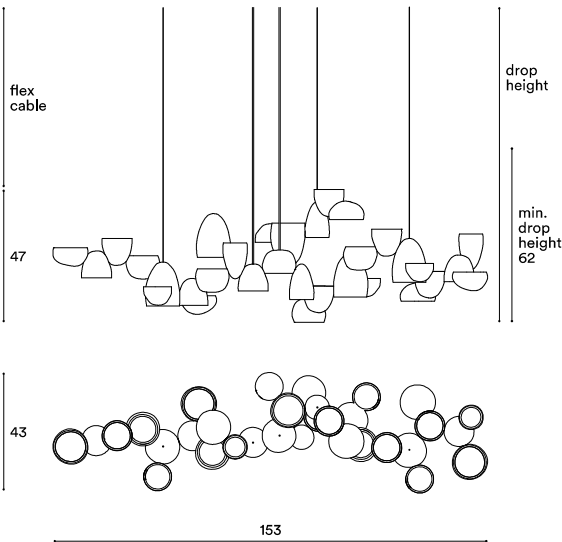

STEP 1: METAL FINISHES



Raw Aluminium
RA



Mineral White
MN



Polished Aluminium
PA



Blackened Aluminium
BA



Bronzed Aluminium
ZA

STEP 2: SUSPENSION (Fabric flex cable)

FABRIC FLEX CABLE	FINISH	DROP HEIGHT	CODE
	Black	Max 4 meters	04B
		Max 10 meters	10B

STEP 3: CANOPY

Type of Canopy		FINISH	CODE WITH DIMMABLE STANDARD			
			Phasecut	0-10 Volt Alternative dimming standard, if required by electrician	Switch / Push	DALI
	1 Canopy: Ø27×H4.5cm Driver position: Built-in	White (9016)	WH270BP	WH270BV	WH270BS	WH270BD
		Raw Alum.	RA270BP	RA270BV	RA270BS	RA270BD
		Blackened Alum.	BA270BP	BA270BV	BA270BS	BA270BD
		Bronzed Alum.	ZA270BP	ZA270BV	ZA270BS	ZA270BD
		Polished Alum.	PA270BP	PA270BV	PA270BS	PA270BD
	1 Canopy: Ø27×H4.5cm Driver position: Remote Requires Electrician's Approval	White (9016)	WH270RP	WH270RV	WH270RS	WH270RD
		Raw Alum.	RA270RP	RA270RV	RA270RS	RA270RD
		Blackened Alum.	BA270RP	BA270RV	BA270RS	BA270RD
		Bronzed Alum.	ZA270RP	ZA270RV	ZA270RS	ZA270RD
		Polished Alum.	PA270RP	PA270RV	PA270RS	PA270RD

Custom colours (RAL Classic): availability and price upon request

Scarabei Chandelier Linear 185

SCCHLN185



MATERIALS

Hand-finished or electroplated aluminium, Crystal Murano glass

WEIGHT INCL. CANOPY

Max 21.2 kg

POWER INPUT

220-240V 50-60Hz

LIGHT SOURCE (INCLUDED)

38 Proprietary LEDs,
49W, 7350 Lumens, 2700K warm white. CRI>95
54% downwards and 46% upwards



SCARABEI CHANDELIER LINEAR 185


CONFIGURATION

VERSION

SIZE (UNIT: CM)

Scarabei Chandelier Linear 185

SCCHLN185

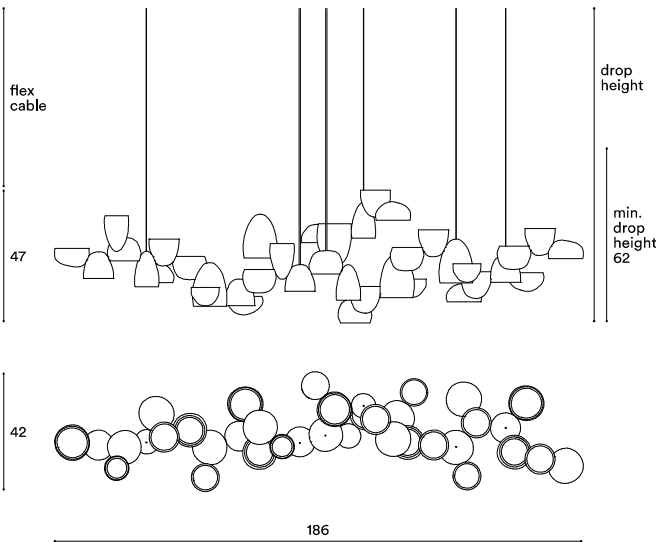

STEP 1: METAL FINISHES



Raw Aluminium
RA



Mineral White
MN



Polished Aluminium
PA



Blackened Aluminium
BA



Bronzed Aluminium
ZA

STEP 2: SUSPENSION (Fabric flex cable)

FABRIC FLEX CABLE	FINISH	DROP HEIGHT	CODE
	Black	Max 4 meters	04B
		Max 10 meters	10B

STEP 3: CANOPY

Type of Canopy		FINISH	CODE WITH DIMMABLE STANDARD			
			Phasecut	0-10 Volt Alternative dimming standard, if required by electrician	Switch / Push	DALI
	1 Canopy: Ø27×H4.5cm Driver position: Built-in	White (9016)	WH270BP	WH270BV	WH270BS	WH270BD
		Raw Alum.	RA270BP	RA270BV	RA270BS	RA270BD
		Blackened Alum.	BA270BP	BA270BV	BA270BS	BA270BD
		Bronzed Alum.	ZA270BP	ZA270BV	ZA270BS	ZA270BD
		Polished Alum.	PA270BP	PA270BV	PA270BS	PA270BD
	1 Canopy: Ø27×H4.5cm Driver position: Remote Requires Electrician's Approval	White (9016)	WH270RP	WH270RV	WH270RS	WH270RD
		Raw Alum.	RA270RP	RA270RV	RA270RS	RA270RD
		Blackened Alum.	BA270RP	BA270RV	BA270RS	BA270RD
		Bronzed Alum.	ZA270RP	ZA270RV	ZA270RS	ZA270RD
		Polished Alum.	PA270RP	PA270RV	PA270RS	PA270RD

Custom colours (RAL Classic): availability and price upon request