


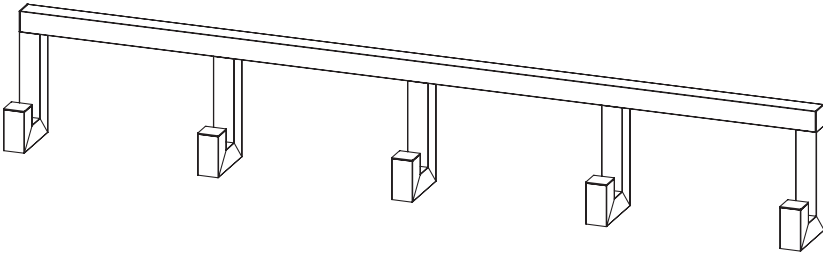






Tig Hook

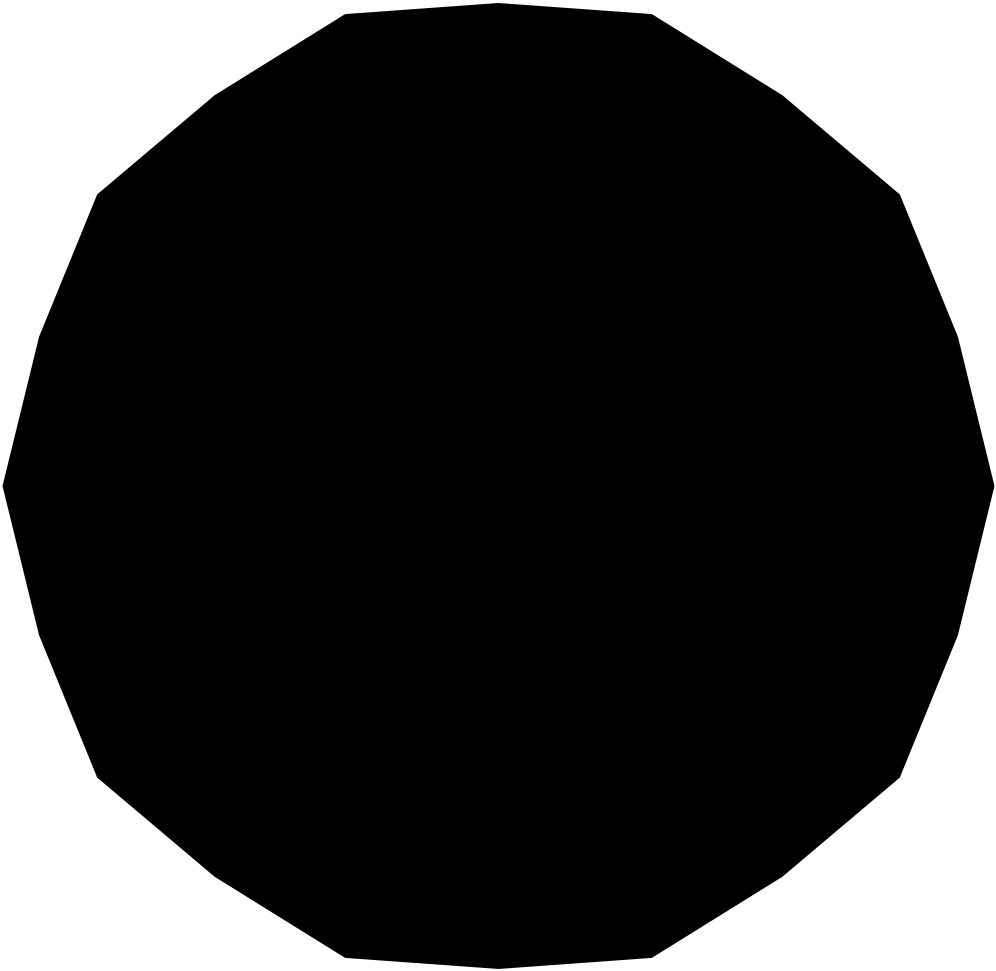


Assembly Instruction

Parts	
	
Tig Hook Single	Tig Hook Double
	
Tig Hook Quintuple	

Tig Hook Single	
	Step 1 Place the hook in the desired position and mark the top of the hook on the wall with a pencil.
	Step 2 The top screw should be placed 2 cm below the mark from step 1. Mark this position with an X. The two screws should be placed vertically 12 cm apart. Use a leveler to ensure straightness and mark with an additional X. If more hooks are to be placed next to each other on a straight line, use a leveler to mark a horizontal position from the top X mark.
	Step 3 Tighten the screws, but leave the head of the screw protruding to be able to hang the hook. Please make sure to use screws and plugs suitable for the material of the wall, if unsure, contact a professional for support.
	Step 4 Hang the hook and press down. If the hook feels loose, remove the hook, tighten the screws a bit more and hang the hook back again for a tighter fit.



Tig Hook Double

Step 1

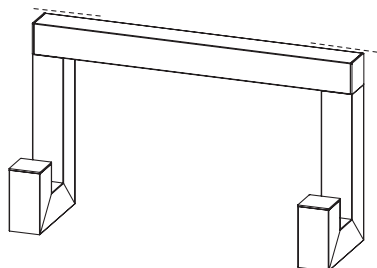

Place the hook in the desired position and mark the top over the hooks on the wall with a pencil


Step 2

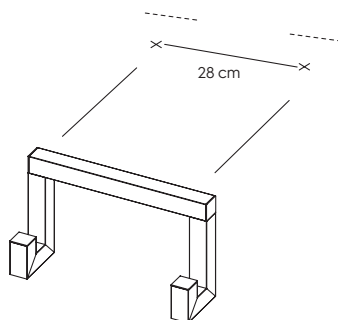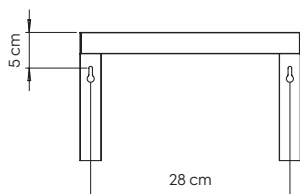

The screws should be placed 5 cm below the mark from step 1. Mark the left most position with an X. The two screws should be placed horizontally 28 cm meters apart. Use a leveler to ensure straightness and mark with an additional X.

If more hooks are to be placed next to each other on a straight line, use a leveler to mark an horizontal position from these X marks.


Step 3

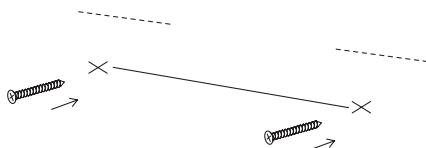

Tighten the screws, but leave the head of the screw protruding to be able to hang the hook.

Please make sure to use screws and plugs suitable for the material of the wall, if unsure, contact a professional for support.


Step 4

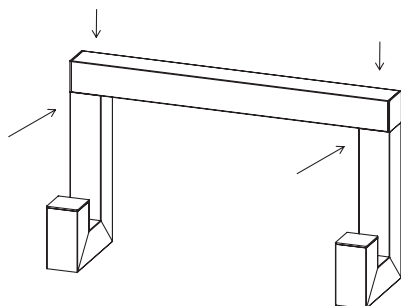

Hang the hook and press down. If the hook feels loose, remove the hook, tighten the screws a bit more and hang the hook back again for a tighter fit.


Tig Hook Quintuple

Step 1

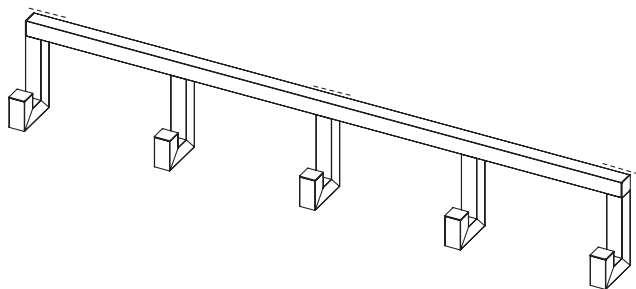


Place the hook in the desired position and mark the top over the hooks on the wall with a pencil

Step 2

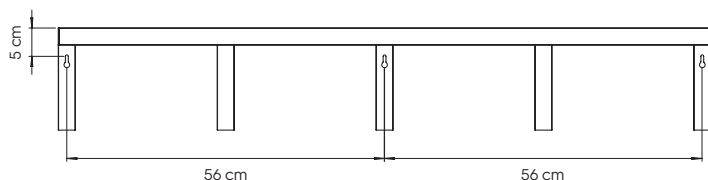


The screws should be placed 5 cm below the mark from step 1. Mark the left most position with an X. The three screws should be placed horizontally 56 cm meters apart from each other. Use a leveler to ensure straightness and mark with two additional X's.

If more hooks are to be placed next to each other on a straight line, use a leveler to mark an horizontal position from these X marks.

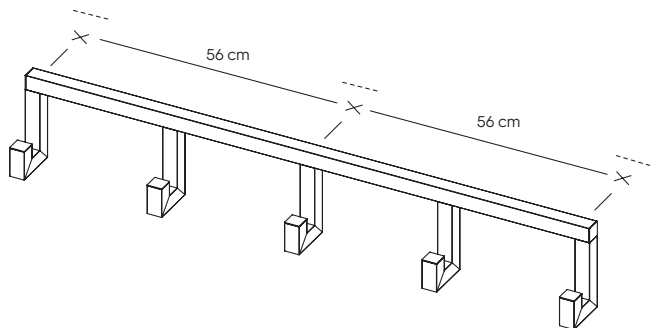


Step 3

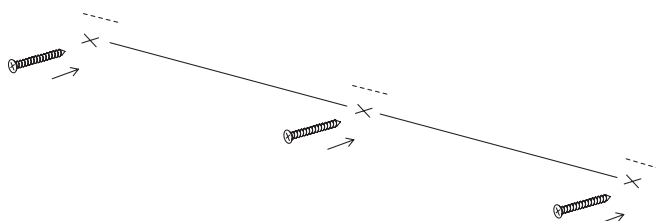

Tighten the screws, but leave the head of the screw protruding to be able to hang the hook.

Please make sure to use screws and plugs suitable for the material of the wall, if unsure, contact a professional for support.

Tig Hook Double

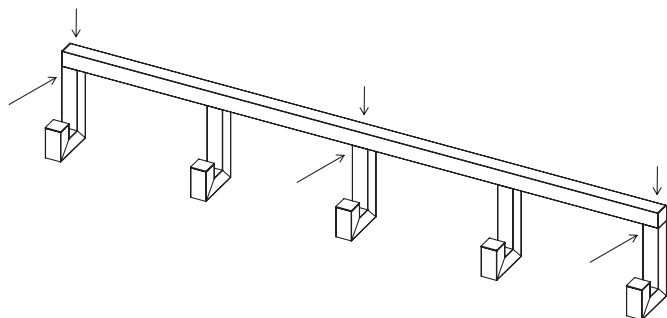

Step 4

Hang the hook and press down. If the hook feels loose, remove the hook, tighten the screws a bit more and hang the hook back again for a tighter fit.

[illegible]

Should you have any problems assembling your product, contact us at info@hem.com. We're always happy to help!

We have carefully selected the materials used in this product, and ask you to treat it responsibly too.
Please recycle all packaging according to your local disposal rules.

Hem